




N-SPEX STIX


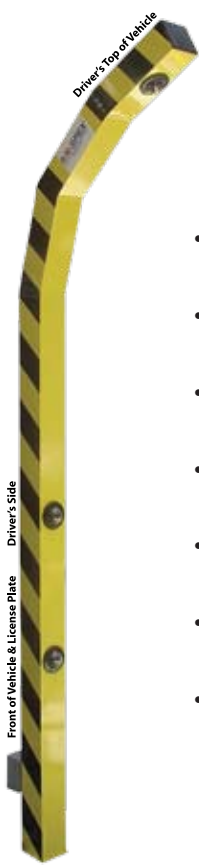


- 2 STIX with 3 cameras in each
- 9 feet tall
- 4" square aluminum, powder coated in bright yellow, with black caution tape striping
- 3 holes in bottom plate to except concrete anchors (included)
- Camera is power wired in series down to double gang electrical box
- Individual coax runs for each camera terminated at double gang electrical box
- Camera wrench and lock screw, for each camera, located in double gang electrical box

patent pending

Camera Specifications

Image Sensor	1/3" Sony Super HAD II CCD
Effective Pixels	NTSC: 768(H) x 494(V) PAL: 752(H) x 582(V)
Horizontal Resolution	550 TV Lines
Synchronizing System	Internal
Video output	1.0Vp-p Composite 75 Ohms
S/N ratio	More than 50dB (AGC Off)
Min. Illumination	0.1 Lux at F2.0
BLC	Automatic
White Balance	2100°K - 9100°K Auto
Gain Control	4dB-32dB Auto
Gamma correction	$\gamma = 0.45$
Smear effect	0.005%
Shutter speed	NTSC: 1/60 - 1/100,000 sec PAL: 1/50 - 1/100,000 sec
MTBF	80,000 hours
Power Source	DC12V
Operation current	90mA w/ regulated 12VDC power in
Lens Standard	2.9mm (120°)
Lens Option	3.6mm (92°), 4.3mm (78°), 6.0mm (54°)
Operating Temperature	14° F - 122°F (-10°C - +50°C)
Humidity	Within 90% RH
Output Terminal	4 Feet DIY cable with
Cable connection	BNC-Female for Video, DC Jack-Male for Power
Measurement	Surface Mount: 3.11"(D) x 2.17"(L) Flush Mount: 3.11"(D) x 2.28"(L)
Weight (approx)	.66 lbs.
Optional Feature 1	IR Sensitive for Day and Night Vision
Optional Feature 2	External Audio with C-Microphone *-35dB / mV"

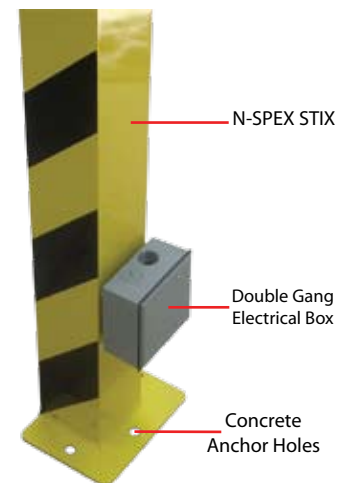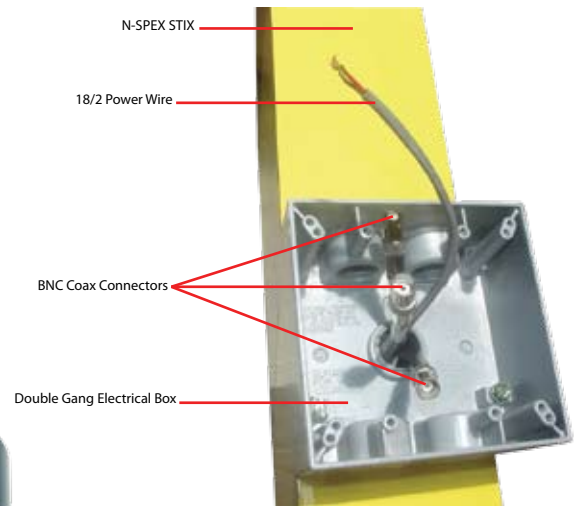

201 North Elm Street • Kemp, TX 75143
 1-866-301-CCTV
 Phone: 903-498-3240 • Fax: 903-498-8989
 sales@rugged-cctv.com • www.rugged-cctv.com